

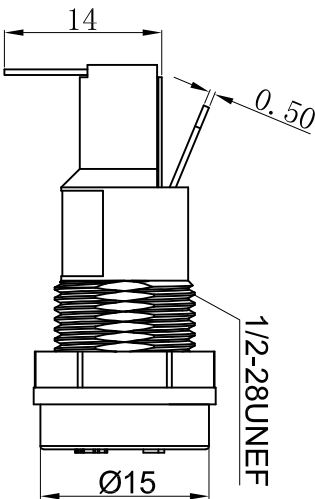
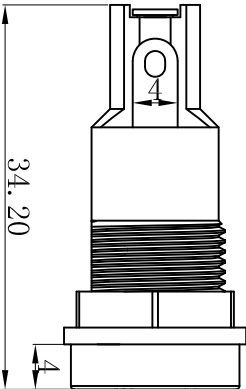


捷森電子工業股份有限公司
JACKSON ELECTRONICS IND. CORP.



Fuse holder for overload protection
Screw-in mounting
Rating: 10A 250VAC (UL,CUL,CQC)
Fuse: Ø5.0x20mm
Cap: Bayonet type
Panel thickness: 4.5mm max
Operating Temperature: -10°C ~ +70°C




Welding method: Manual Soldering (350±5°C, 3s±0.5s)

cULus

CE

CQC

CUT-OUT

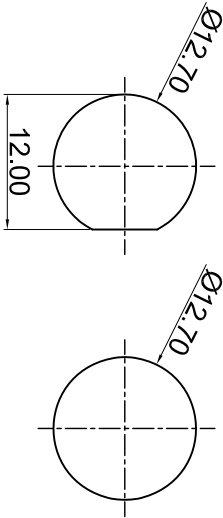

MATERIAL:

Housing: PBT, UL rated 94V0
Bayonet: PBT, UL rated 94V0
Terminal: Brass, silver plated
Nut: PBT, UL rated 94V0

A3	塑胶螺母加厚, 图纸尺寸整理	2019.10.09	N/A	公差 TOLERANCES	.X±0.3	.XX±0.15	角度 ANGLE	±1°	单位	DIMENSION UNIT	mm.
A2	图纸重新整理	2016.12.11	N/A	视角 VIEWING ANGLE	比例尺 SCALE	NONE	日期 DATE	2019.10.09	品名	TITLE	图号
A1	图纸重新整理	2014.07.18	N/A	核准 RICHARD	核对 CHECKED BY	SINC	绘图 DRAWN BY	MASHAOFEI	JF-206B		DRAWING NO
A0	New Issue	2011.09.05	N/A								
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	核准 APPROVED BY	核对 CHECKED BY	SINC	绘图 DRAWN BY	MASHAOFEI	JF-206B		DRAWING NO