

Fuse holder for overload protection

Screw-in mounting

Rating:15A 250VAC (UL,CUL)




Fuse:Ø6.0x30mm




Cap:Screw type

Panel thickness:4.5mm max




Operating Temperature:-10°C~+70°C

Welding method:Manual Soldering (350 ° C±5 ° C,3s±0.5s)

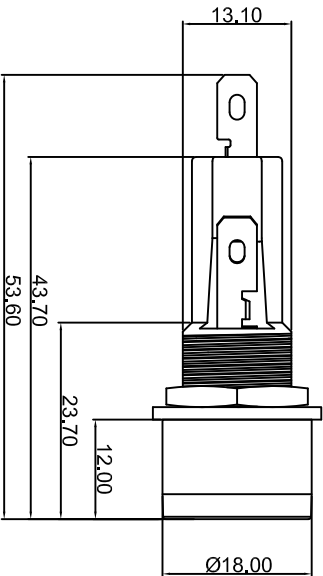

CUT-OUT



MATERIAL:

Housing:PBT,UL rated 94V0

Bayonet:PBT,UL rated 94V0

Terminal:Brass,silver plated

Nut:Zn Alloy,Ni plated

			公差 TOLERANCES		角度 ANGLE		單位 DIMENSION UNIT		mm.	
			视角 VIEWING ANGLE	核准 RICHARD	比例尺 SCALE	NONE	日期 DATE	品名 TITLE	图号 DRAWING NO	
A2	重新整理	2016.12.11	N/A				2016.12.11	JF-207A		
A1	开孔尺寸变更	2012.02.18	N/A							
A0	New Issue	2011.05.11	N/A							
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	核准 APPROVED BY	核对 CHECKED BY	Sinc	绘图 DRAWN BY	P.W.Rao		