
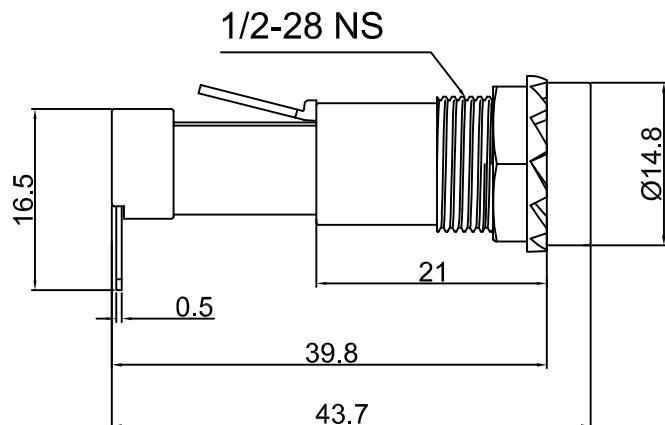


JACKSON ELECTRONICS IND. CORP.  
捷森電子工業股份有限公司



FH201-9

受控文件

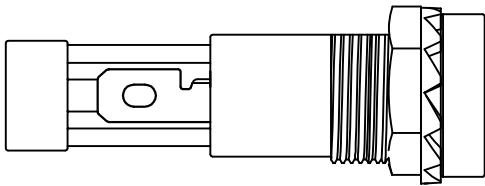

MATERIAL:

Housing:PBT,UL rated 94V2 min  
Bayonet:PBT,UL rated 94V2 min  
Terminal:Brass,silver or tin plated  
Nut:PBT,UL rated 94V2 min

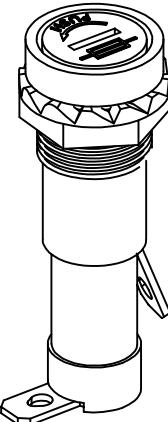


Fuse holder for overload protection

Screw-in mounting

Rating: 15A 250VAC (UL,CUL)

Fuse:Ø6.0x30mm 


Cap:Bayonet type

Panel thickness:4.5mm max 

Operating Temperature:-10 °C~+70 °C



CUT-OUT



				公 差 TOLERANCES		. X±0.3 . XX±0.15			角度 ANGLE + 1°		单位 DIMENSION UNIT mm.		
		版 本 VERSI0N	A1	比例 尺 SCALE	1:1	日 期 DATE	2009.02.26			品 名 TITLE	图 号 DRAWING NO		
A1	重新整理发行							核 准	APPROVED BY				
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO							JF-2341			