



THICKNESS		DIMENSION A	
0.8	~ 1.0	31.2	^{+0.1} ₋₀
1.1	~ 1.4	31.4	^{+0.1} ₋₀
1.5		31.6	^{+0.1} ₋₀

SUGGESTED MOUNTING HOLE

NOTES :

- Model : SS-005
- Specification (Voltage , Ampere , Cycle) and circuit diagram shall be permanently and legibly marked on the surface of cover.
- Parts and materials as per below list.
- Unless otherwise specified dimensions are in millimeters.
- tolerance : $\pm 0.3\text{mm}$
- Do not scale drawing.
- Structure and dimension as per left drawing.
- UL file No. : E152074.

NO.	PARTS NAME	QTY	PC SET	MATERIAL	REMARK
1	terminal #2	2		copper alloy	tin-plated
2	terminal #3	2		copper alloy	tin-plated
3	bi-metal	1		bi-metal	
4	connection rod	2		stainless	
5	bow spring	2		stainless	
6	electrical contact	4		AgSnO ₂	
7	knob	1		PC	
8	cover	2		nylon+G.F.	
9	body	1		nylon+G.F.	
10	rivet	2		aluminum	
11	screw	2		cold roll steel	black coated
12	spring	2			
13	bottom knob	1		nylon	
14	neon lamp	1			
15	resistor	2			

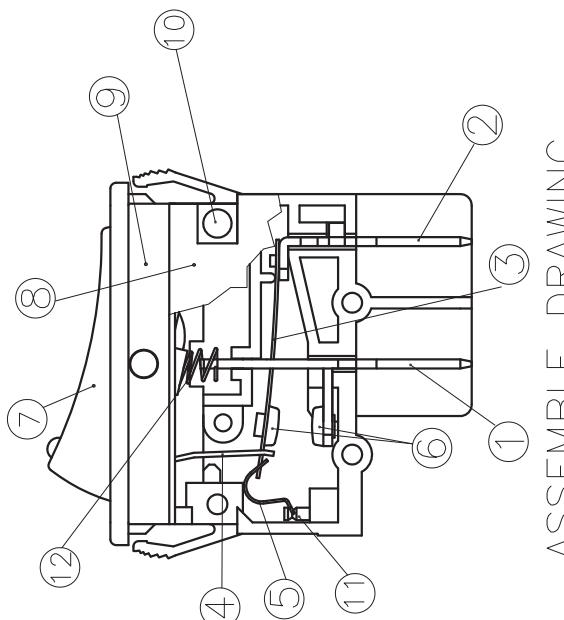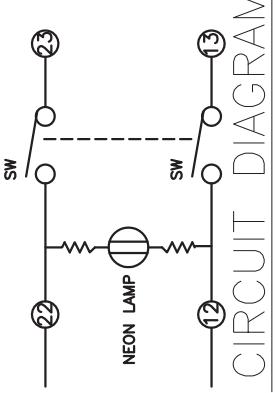

ASSEMBLE DRAWING

捷森電子工業股份有限公司

ITEM	UNIT	SCALE	TITLE
MATL AS TABLE	mm	NONE	CIRCUIT BREAKER
FINISH AS TABLE	mm	SHEET 1/1	WITH POWER SWITCH
APPR.	DSN YXD	DATE 2018.01.01	ART. NO. SS-005-15A(220V) REV. A.1
			P0008