

Specifications :


- *Standard Rating : 3~50 AMPERE.
- *Input Power : 125 VAC / 250 VAC / 50 VDC.
- *Dielectric Strength : 1500 VAC / 1 Minute.
- *Interrupt Capacity : 125 VAC x 1000 A, 250 VAC x 2000A.
- *Insulation Resistance : $> 100 \text{ M}\Omega$
- *Calibration : 25°C-100% of Rated Current-Continuously Carried.
25°C -Between 101% to 145%-May Trip or Not.
25°C-150% of Rated Current-Trip Within 1 Hour.
25°C-200% of Rated Current-Trip Within 1 Minute.

*Contact Endurance :

125 VAC x 150% of Rated Current-500 Cycles.

*Reset : Manual Push Reset/Auto Reset.

TERMINAL

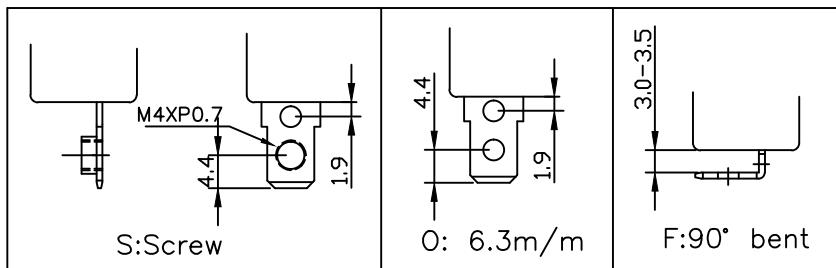

品名 PART NAME	CIRCUIT BREAKER	第三角法	MM
型號 MODEL NO.	JB-802-(10A)	單位 UNIT	
日期 DATE		比例 SCALE	

捷森電子工業股份有限公司
JACKSON ELECTRONICS IND. CORP.