
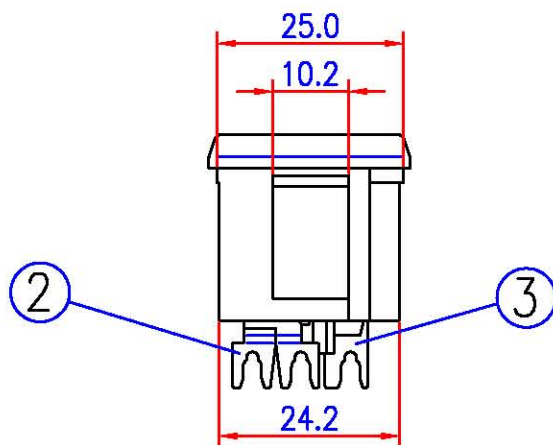


PANEL CUT-OUT

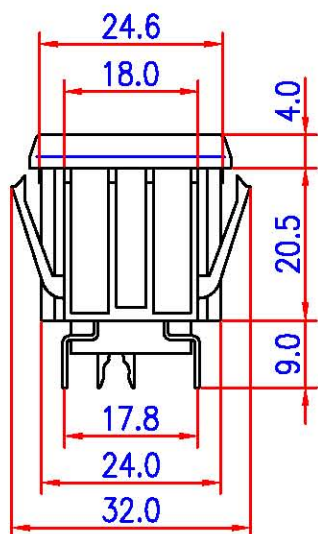

Characteristic

1. Rating : 15A 125VAC
10A 250VAC
2. Contact Resistance : 50m Ohms MAX.
3. Insulation Resistance : 100M Ohms MIN.
4. Insulation Withstand Voltage :
AC 1500V For One Minute
5. Terminal Strength : 5kgs At One Minute
6. Insertion And Withdrawl Force :
 - a. Insertion Force : 6kgs Max
 - b. Withdrawl Force : 1.0kgs MIN.

3	TERMINAL	1	BSP1-EH	0.5x32		
2	TERMINAL	2	BSP1-EH	0.6x32.5		
1	HOUSING	1	N66+GF	UL94-V2		
NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION	REMAR	
DRAW BY	周佩君	060807	SCALE	1 : 1		ITEM NO.
DEGN BY			UNIT	MM		TITLE
APPD BY						SOCKET

JACKSON ELECTRONICS IND. CORP.

捷森電子工業股份有限公司

DATE DRAWG BY REVISED



DWG.NO. SS-6B