


年	月	日	更正者	更正記事	



SPECIFICATIONS

1. Rating: 15A 250VAC
2. Dielectric Strength: AC 2000V 1 Minute
3. Insulation Resistance: MORE THAN 100M Ω at DC 500V
4. Certification: UL

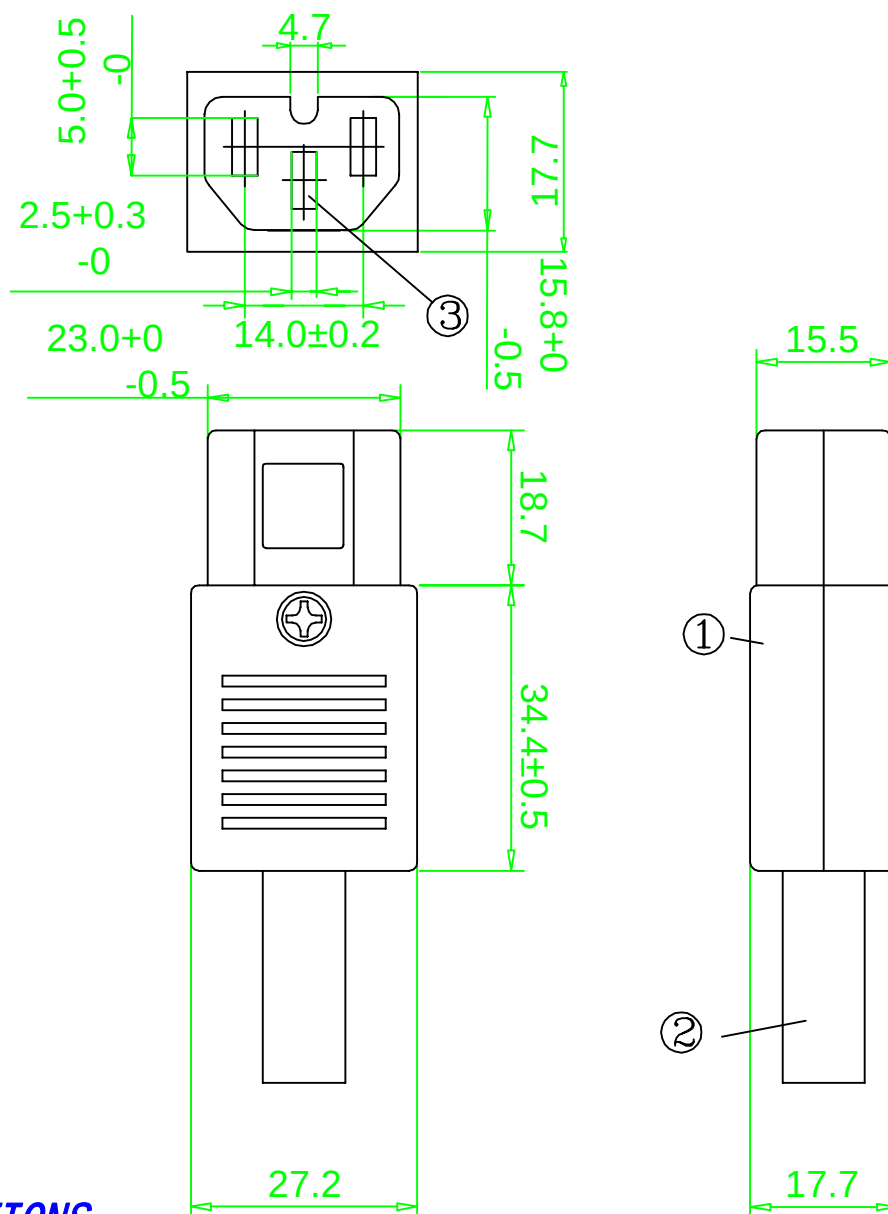

5. This device is intended to be wired with Type SJT, NO.18/3C TO NO.14/3C AWG Flexible cord

1	BODY	1	NYLON#66	94V-2	or 94V-0	Q2231-01A/04B
2	CORD	1	PVC	94V-0		Q2231-01H
3	TERMINAL	3	Bsp1-1/2H	t=0.8	Ni-PLATED	Q2231-01C/01D
4	PLATE	1	NYLON#66	94V-2		Q2231-01C
5	SCREW	6	鐵鍍鎳			


編號	零件名稱	數量	材質	規格	加工處理	備註
製圖	LEO ZHENG	110	11	01	品名	JA-2231 系列承認圖
描圖	LEO ZHENG	110	11	01	品號	JA-2231-H
校對	Davy Chen	110	11	01	圖號	A2231-04
核准	Johnson chen	110	11	01	比例	1:1



捷森電子工業股份有限公司

檔案號碼

A2231-04



請勿實測圖面