


年	月	日	更正者	更正記事	




SPECIFICATIONS

- 1.Rating: 16/20A 250VAC
- 2.Dielectric Strength: AC 2000V 1 Minute
- 3.Insulation Resistance: MORE THAN 100M Ω at DC 500V
- 4.Certification: UL , ENEC

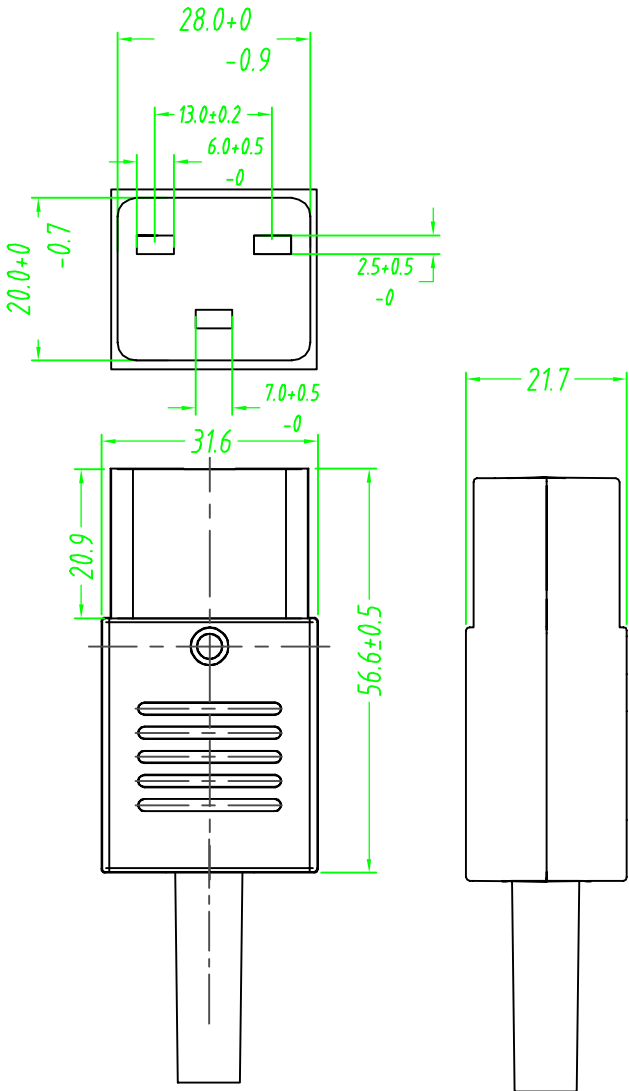

5.This device is intended to be wired with Type SJT, NO.14/3C TO NO.12/3C AWG Flexible cord

1	BODY	1	NYLON#66	94V-2	or 94V-0	Q2261-01A/01B
2	CORD	1	PVC	94V-0		Q2261-01H
3	TERMINAL	3	Bsp1-1/2H	T=2.0	Ni-PLATED	Q2261-01C/01D
4	PLATE	1	NYLON#66	94V-2		Q2231-01G
5	SCREW	6	鐵鍍鎳			
編號	零件名稱	數量	材質	規格	加工處理	備註
製圖	LEO ZHENG	110	11	01	品名	JA-2261 系列承認圖
描圖	LEO ZHENG	110	11	01	品號	JA-2261
校對	Davy Chen	110	11	01	圖號	A2261-01
核准	Johnson chen	110	11	01	比例	1:1
JEC 捷森電子工業股份有限公司					檔案號碼	A2261-01



請勿實測圖面