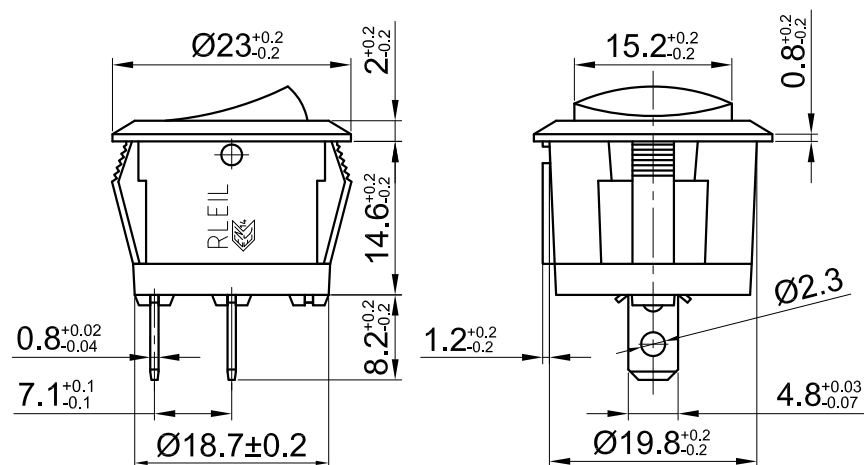


MATERIALS


1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: NYLON #66 UL 94V-2
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO₂In₂O₃ (10) / Cu

SPECIFICATION

1. RATING: UL C-UL: 10A 125VAC
ENEC SEMKO:
6(2)A 250VAC T125/55 1E4
2. CIRCUIT: ON-OFF SPST 2P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 300~600gf
8. OPERATION TEMPERATURE RANGE: -25~+125° C

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	20.2
1.25-2.0	20.4
2.0-3.0	20.6

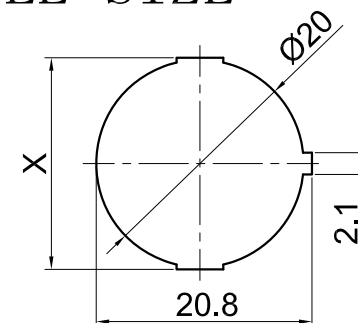

JACKSON ELECTRONICS IND. CORP. 捷森電子工業股份有限公司						JS-606-2A-B/B-2H	
设计 签名 年月日 标准化 签名 年月日 绘图 符辉 13.09.23 审核 张雪飞 工艺						TITLE	SERIES
						ROCKER SWITCH	RL3-5
							FUNCTION
						VIEWS TYPE	DRAWING NUMBER
							ON-OFF