


1. HOUSING:Nylon #66 UL 94V-2
2. ROCKER:Nylon #66 UL 94V-2
3. TERMINAL:Copper Alloy Ag plated
4. CONTACTOR:AgSnO₂In₂O₃(10)/Cu

1. RATING:UL C-UL:10A 125VAC
ENEC:
6(2)A 250VAC T125/55 1E4
2. CIRCUIT:ON-OFF SPST 2P
3. CONTACT RESISTANCE:30m OHMS Max
4. INSULATION RESISTANCE:DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE:AC 1500V 1 Minute
6. ELECTRICAL LIFE:10000 Cycles at Full Load
7. OPERATION FORCE:300~650gf
8. OPERATION TEMPERATURE RANGE:-25~+125° C

Panel thickness	X
0.75–1.25	23.3
1.25–2.0	23.6
2.0–3.0	23.9

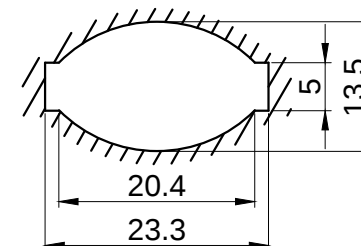

捷森電子工業股份有限公司 JACKSON ELECTRONICS IND. CORP.						JS-606-3-A-B/B-2H	
设计 签名 年月日 标准化 签名 年月日 绘图 符辉 18.05.15 审核 张雪飞 工艺 批准						TITLE	SERIES
						ROCKER SWITCH	RL3-6
							FUNCTION
VIEWS TYPE						DRAWING NUMBER	
