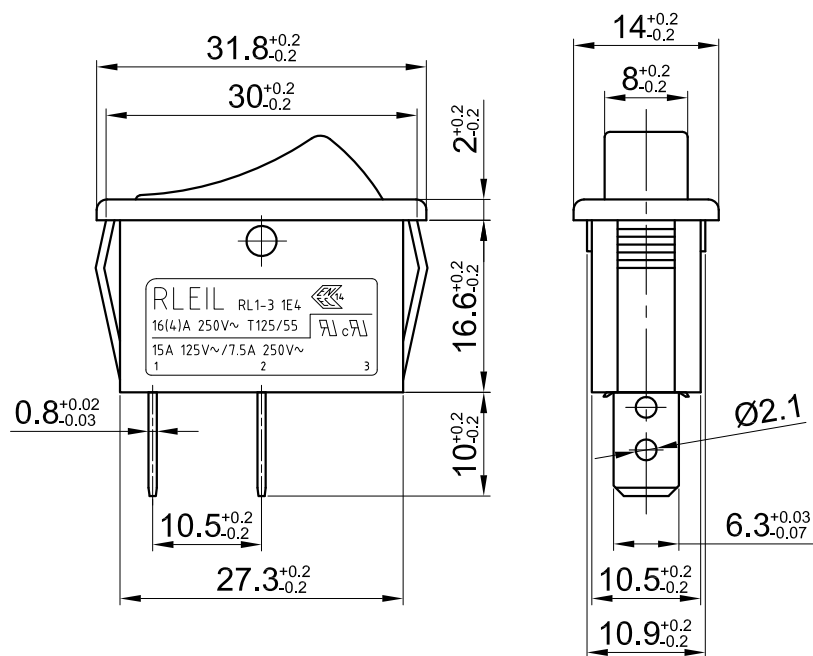



MATERIALS


1. HOUSING:Nylon #66 UL 94V-2
2. ROCKER:NYLON #66 UL 94V-2
3. TERMINAL:Copper Alloy Ag plated
4. CONTACTOR:AgSnO₂In₂O₃(10)/Cu

SPECIFICATION

1. RATING:UL C-UL:15A 125VAC/7.5A 250VAC
ENEC SEMKO:
16(4)A 250VAC T125/55 1E4
2. CIRCUIT::ON-OFF SPST 2P
3. CONTACT RESISTANCE:30m OHMS Max
4. INSULATION RESISTANCE:DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE:AC 1500V 1 Minute
6. ELECTRICAL LIFE:10000 Cycles at Full Load
7. OPERATION FORCE:500~700gf
8. OPERATION TEMPERATURE RANGE:-25~+125° C

PANEL HOLE SIZE

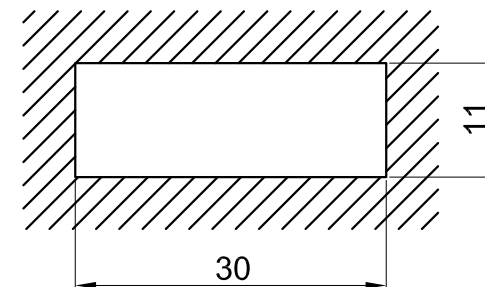

JACKSON ELECTRONICS IND. CORP. 捷森電子工業股份有限公司						RL1-4-A-0-BB-2	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES RL1-3 (W)
绘图	符辉	14.12.19					FUNCTION ON-OFF
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				