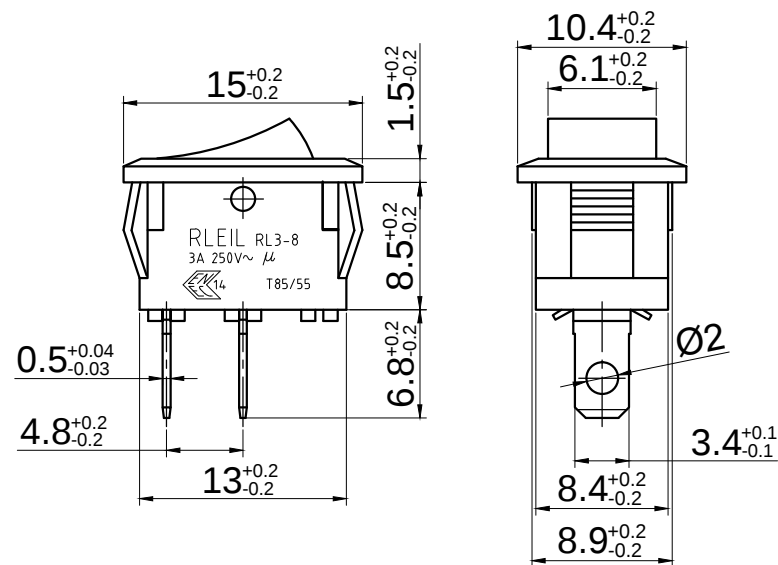


MATERIALS


- HOUSING:Nylon #66 UL 94V-2
- ROCKER:Nylon #66 UL 94V-2
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO₂In₂O₃(10)/Cu

SPECIFICATION

- RATING:UL C-UL:6A 125VAC
ENEC SEMKO:3A 250VAC T85/55
- CIRCUIT:ON-OFF SPST 2P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:200~500gf
- OPERATION TEMPERATURE RANGE:-25~85° C
- PRESSURE OF THE TERMINAL FORCE:MAX 6.5Kgf

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	13.9
1.25-2.0	14.1
2.0-3.0	14.3

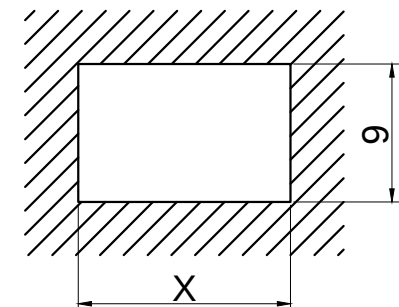

JACKSON ELECTRONICS IND. CORP. 捷森電子工業股份有限公司						JS636A-QB/B-3	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES RL3-8
绘图	符辉	18.05.27					FUNCTION ON-OFF
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				