
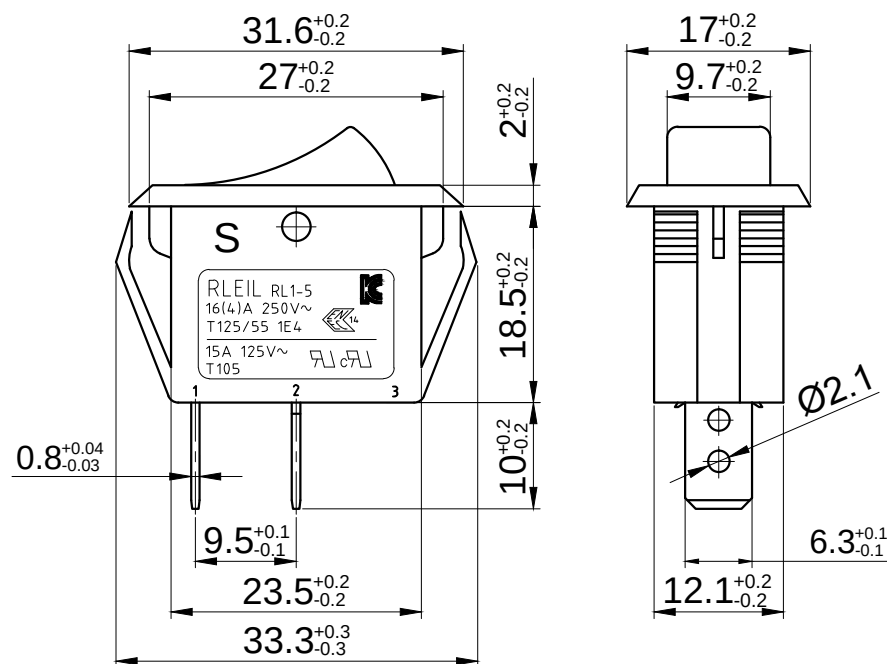



CIRCUIT DIAGRAM:



SPECIFICATION

- RATING:UL C-UL:15A 125VAC/7.5A 250VAC
ENEC :
16(4)A 250VAC T125 1E4
- CIRCUIT:ON-OFF SPST 2P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:400~800gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

PANEL HOLE SIZE

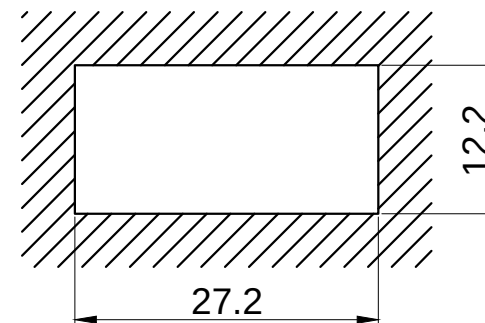

MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:NYLON #66 UL 94V-2
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO₂In₂O₃(10)/Cu

JACKSON ELECTRONICS IND. CORP. 捷森電子工業股份有限公司						RL1-5-A-R/B-2-S	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES RL1
绘图	符辉	20.04.22					FUNCTION ON-OFF
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				