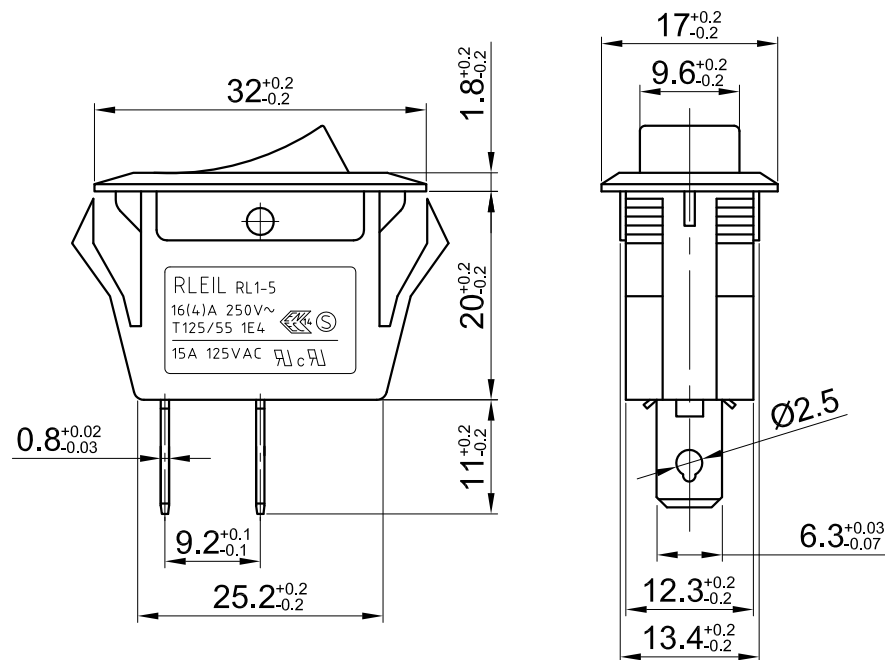



MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: Nylon #66 UL 94V-2
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO₂In₂O₃ (10) / Cu

SPECIFICATION

1. RATING: UL C-UL: 15A 125VAC
ENEC SEMKO:
16(4)A 250VAC T125/55 1E4
2. CIRCUIT: ON-OFF SPST 2P
3. VOLTAGE: 220VAC
4. CONTACT RESISTANCE: 30m OHMS Max
5. INSULATION RESISTANCE: DC500V 100M OHMS Min
6. WITHSTAND VOLTAGE: AC 1500V 1 Minute
7. ELECTRICAL LIFE: 10000 Cycles at Full Load
8. OPERATION FORCE: 300~600gf
9. OPERATION TEMPERATURE RANGE: -25~+125° C

PANEL HOLE SIZE

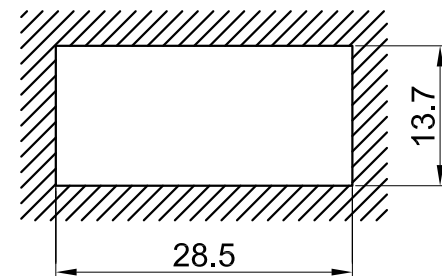

JACKSON ELECTRONICS IND. CORP. 捷森電子工業股份有限公司						RL1-5W-A-BB-2	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES RL1-5
绘图	符辉	14.06.20					FUNCTION ON-OFF
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				