


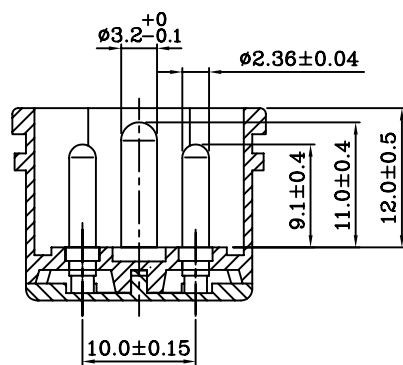
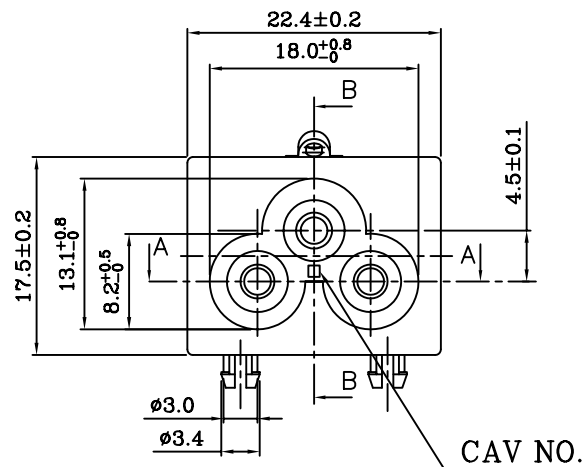
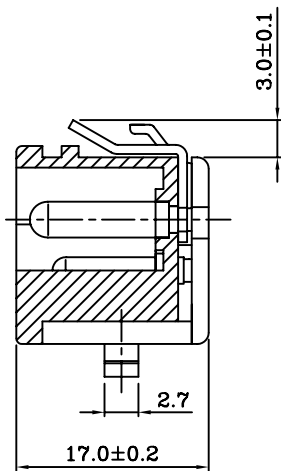
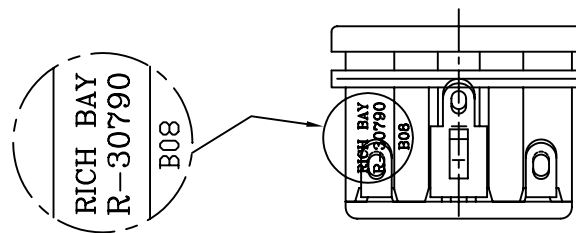


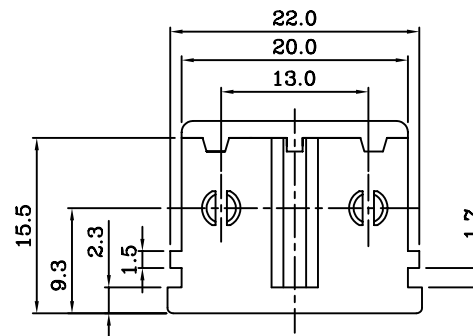

A-A SECTION



B-B SECTION

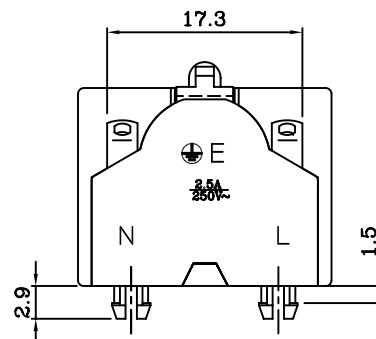


SPECIFICATION:

1. INSULATION RESISTANCE: OVER $100M\Omega$ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Filled Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V	
Mark	Safety Regulation
cA _{us}	cUL _{us}
CCC	CCC
VDE	VDE
ENEC	ENEC

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

JACKSON ELECTRONICS IND. CORP.
捷森電子工業股份有限公司



UNIT

mm

UNIT QTY

1

SCALE

1:1

TOLERANCE

X.XX $\pm$ 0.1
XX.XX $\pm$ 0.2
XXX.XX $\pm$ 0.3

PRODUCT NO.

JR-307(B08)

REV

DRAWN BY

李

2010.9.03

小英

APPROVED BY

羅

2010.9.03

士凱

ID NO

10090313Q

DESCRIPTION

INTERIM NO.

NEW NO.

B