
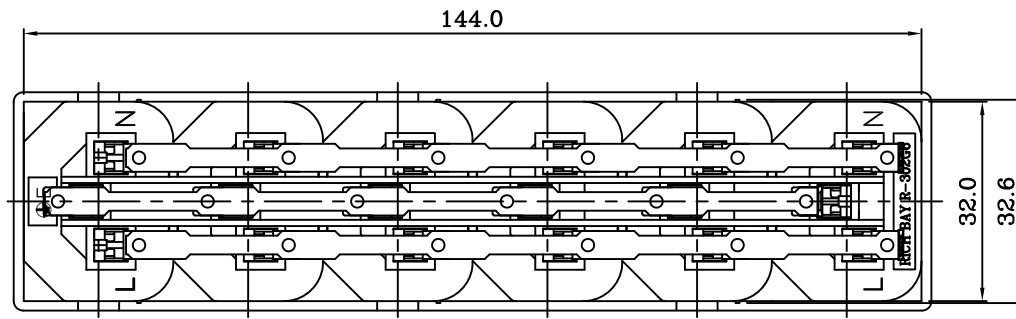
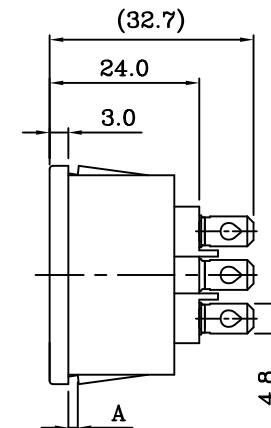


### PANEL CUT-OUT

|  | XX | A   |
|--|----|-----|
|  | 10 | 1.0 |
|  | 12 | 1.2 |
|  | 15 | 1.5 |
|  | 17 | 1.7 |
|  | 20 | 2.0 |
|  | 25 | 2.5 |

- SPECIFICATION:**
1. Insulation Resistance: Over 100MΩ at 500V DC.
  2. Dielectric strength: 2000V AC 1 Minute.
  3. Body Material: Thermoplastic 94V-2~V-0.
  4. Withdrawal force : 30N~50N.


| Rating:AC 10A 250V |                   |
|--------------------|-------------------|
| Mark               | Safety Regulation |
|                    | VDE               |
|                    | ENEC              |
|                    | CCC               |
| Rating:AC 15A 250V |                   |
| Mark               | Safety Regulation |
|                    | CULUS             |

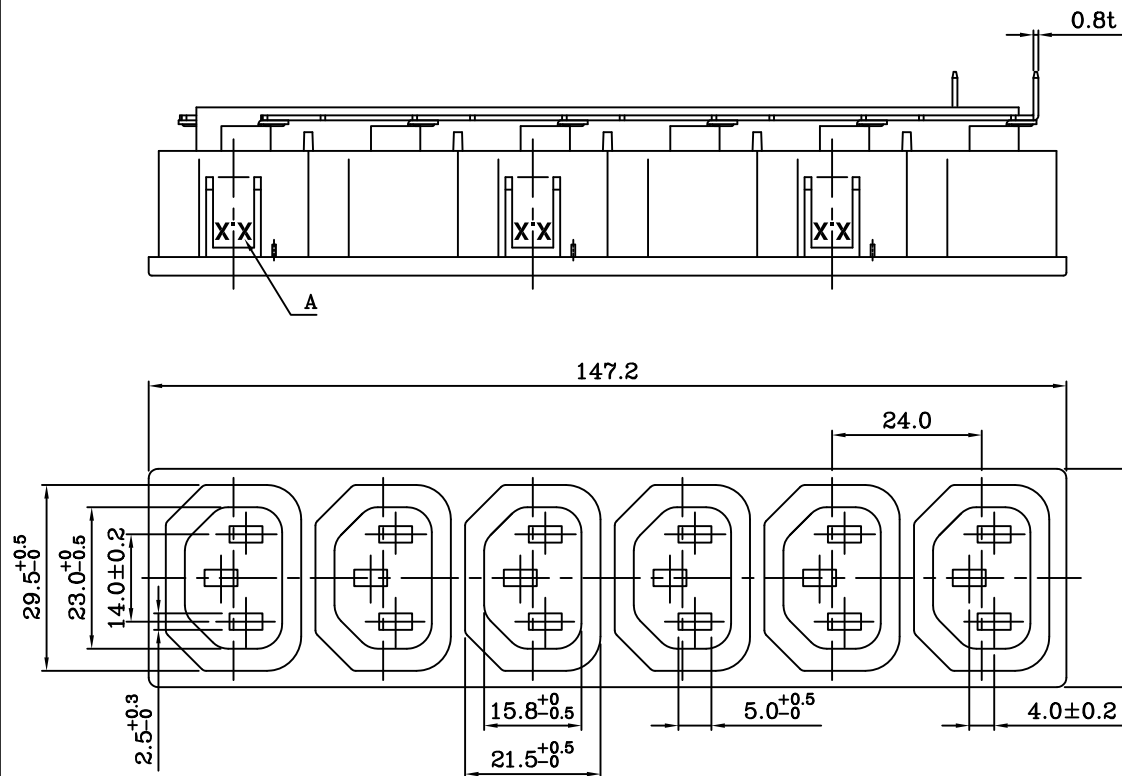

DRAWING:C:DG\NEW-R\T\302\G6\R-302G6 (27) XX. DWG

捷森電子工業股份有限公司

JACKSON ELECTRONICS IND. CORP.



DRAWN BY



UNIT

mm

UNIT QTY

1

SCALE

4:5

TOLERANCE

X.XX±0.1  
XX.XX±0.2  
XXX.XX±0.3

ID NO

140210A03

DESCRIPTION

PRODUCT NO.

JR-302G6-(12)-2

INTERIM NO.

P130905A02

NEW NO.

REV

A