
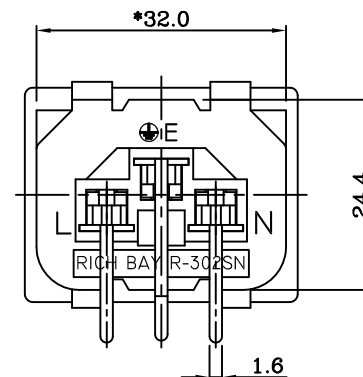
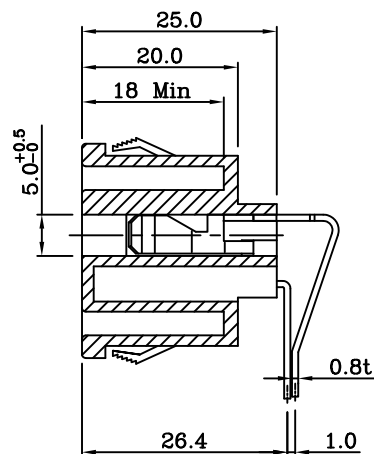
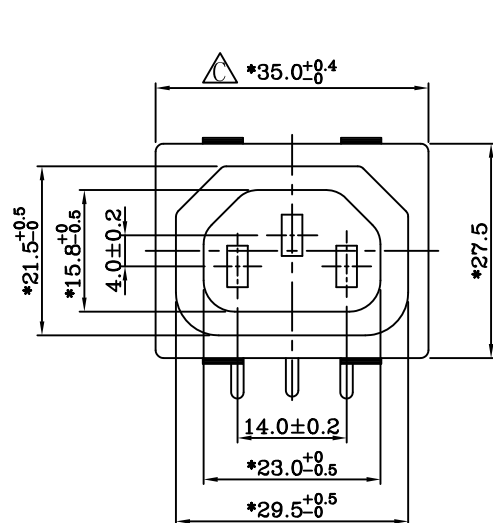



RECOMMENDED
PCB LAYOUT

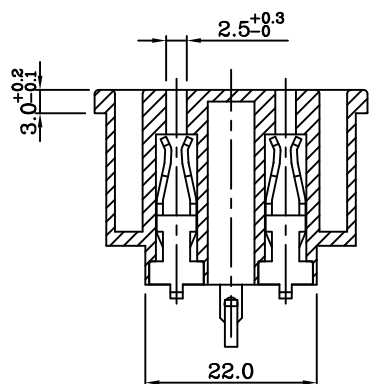

PANEL CUT-OUT


THICKNESS	A
0.8t ~ 1.0t	25.0
1.0t ~ 1.2t	25.2
1.2t ~ 1.5t	25.5
2t	25.7
3t	25.7

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.

Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS
Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC

JACKSON ELECTRONICS IND. CORP.
捷森電子工業股份有限公司



DRAWN BY

UNIT

mm

UNIT Q'TY

1

SCALE

1:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.

JR-121S-G-PC

REV

RD

105.01.25

林文啟

APPROVED BY

RD

105.01.26

張育誠

ID NO

160125A03

INTERIM NO.

DESCRIPTION

NEW NO.

C