


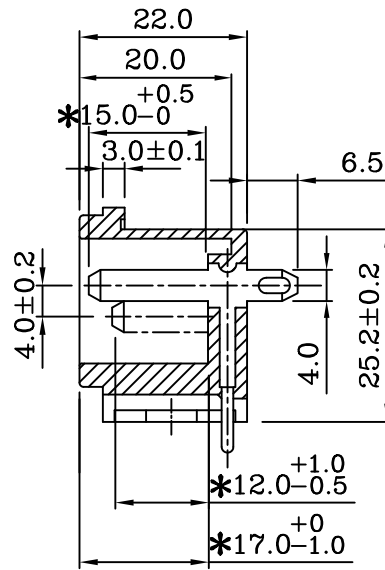
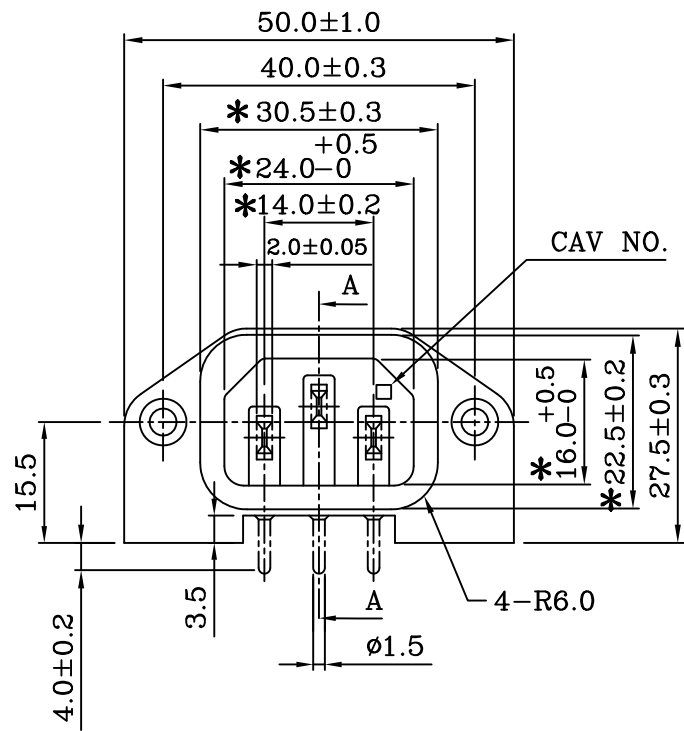
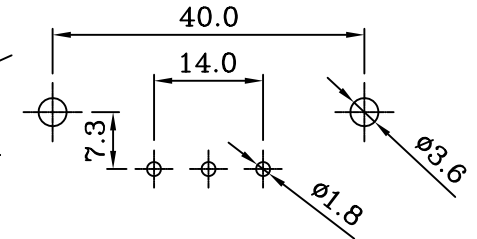


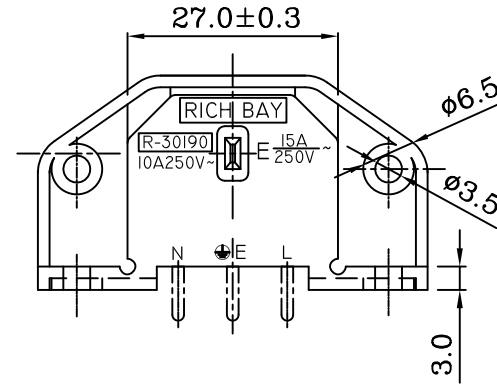

A-A

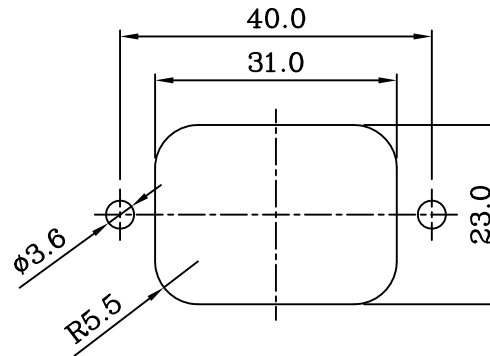

FRONT MOUNTING

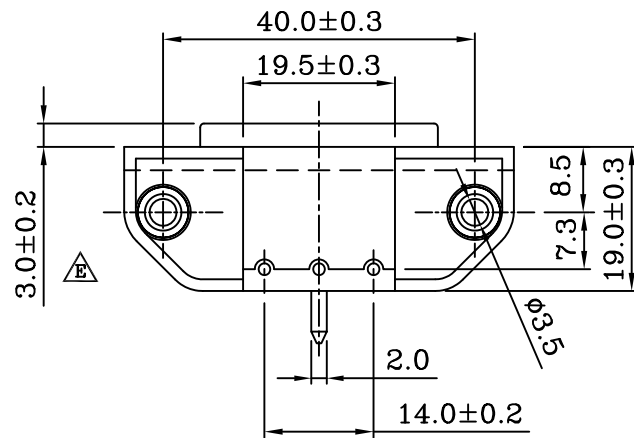

REAR MOUNTING

SPECIFICATION:


1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Material: Black Glass-Fiber Thermoplastic . UL 94V-0~2

| Rating:AC 15A 250V |                   |
|--------------------|-------------------|
| Mark               | Safety Regulation |
| UL                 | UL                |
| cUL                | CUL               |
| Rating:AC 10A 250V |                   |
| Mark               | Safety Regulation |
| VDE                | VDE               |
| CCC                | CCC               |
| ENEC               | ENEC              |

JEC

JACKSON ELECTRONICS IND. CORP.

捷森電子工業股份有限公司  
JACKSON ELECTRONICS IND. CORP.



UNIT

mm

UNIT Q'TY

1

SCALE

1:1

TOLERANCE

X.XX±0.1

XX.XX±0.2

XXX.XX±0.3

PRODUCT NO.

JR-101-1

REV

DRAWN BY

李

2020.05.07

小英

APPROVED BY

朱

2020.05.07

显德

ID NO

20050703Q

INTERIM NO.

DESCRIPTION

NEW NO.

E