



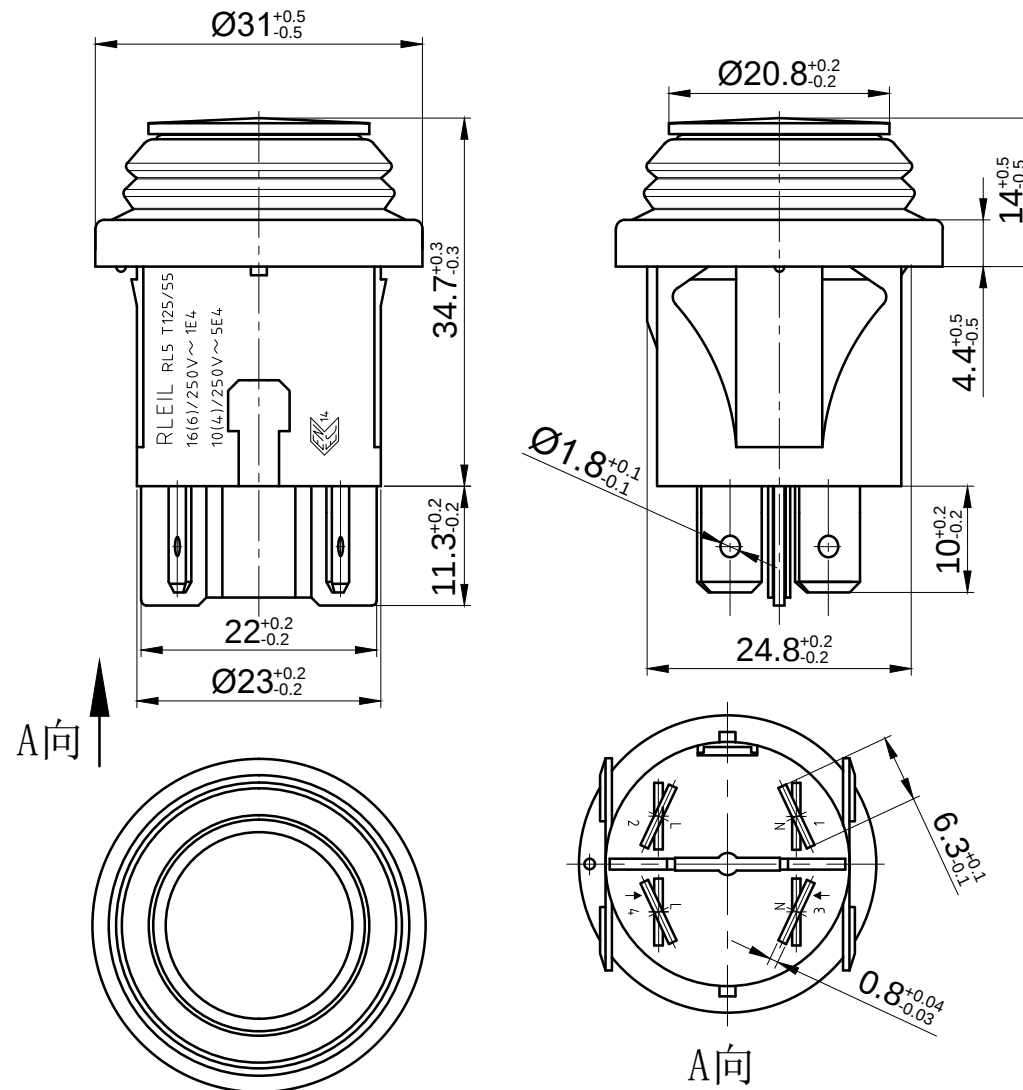


SPECIFICATION

- RATING:UL C-UL:16 125VAC T105
1/2HP 125VAC 3/4HP 250VAC
ENEC :
16(6)/250VAC 1E4 T125/55
10(4)/250VAC 5E4
- CIRCUIT: (ON)-OFF DPST 4P
- VOLTAGE:220VAC
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:1000~1500gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

PANEL HOLE SIZE

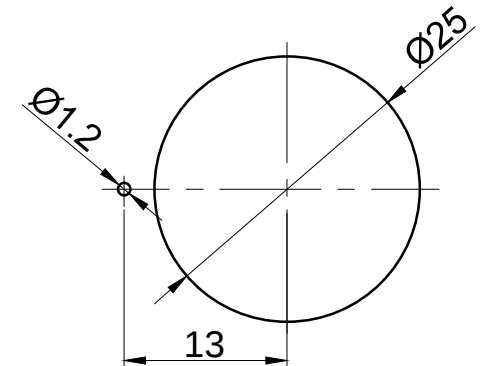

CIRCUIT DIAGRAM



MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:PC UL 94HB
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO₂In₂O₃ (10) /Cu

捷森電子工業股份有限公司 JACKSON ELECTRONICS IND. CORP.						RL5-1(P)-A-RB	
设计	签名	年月日	标准化	签名	年月日	PUSH SWITCH	SERIES RL5
绘图	符辉	20.04.18					FUNCTION ON-OFF
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				