
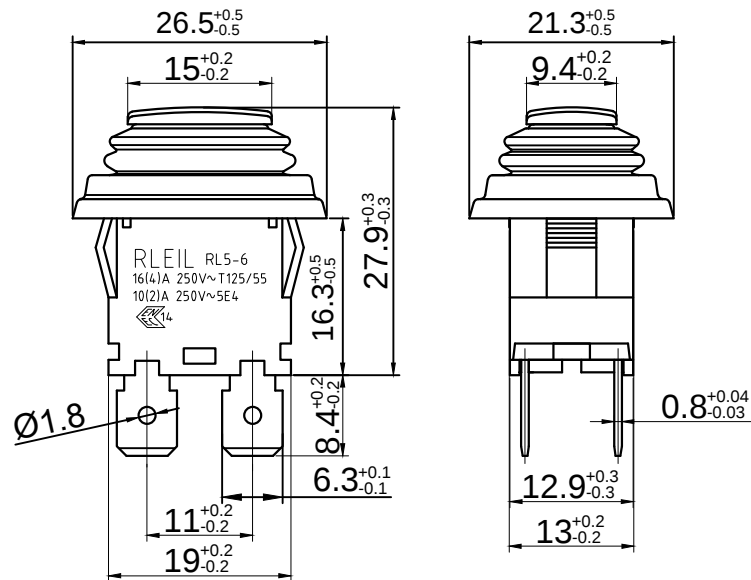



CIRCUIT DIAGRAM




MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: NYLON #66 UL 94V-2
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO₂In₂O₃ (10) / Cu

SPECIFICATION

1. RATING: 16 (4) A 250VAC T125/55
10 (2) A 250VAC 5E4
ENEC
2. CIRCUIT: ON-OFF DPST 4P
3. LAMP VOLTAGE: 220VAC
4. CONTACT RESISTANCE: 30m OHMS Max
5. INSULATION RESISTANCE: DC500V 100M OHMS Min
6. WITHSTAND VOLTAGE: AC 1500V 1 Minute
7. ELECTRICAL LIFE: 10000 Cycles at Full Load
8. OPERATION FORCE: 1000~1400gf
9. OPERATION TEMPERATURE RANGE: -25~+125° C

PANEL HOLE SIZE

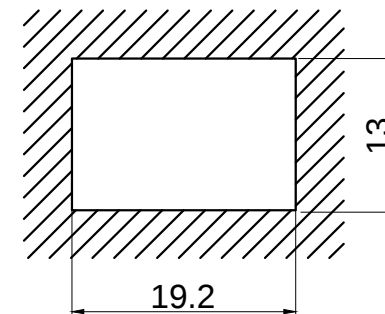

JACKSON ELECTRONICS IND. CORP.						RL5-6(P)-C-B/B	
捷森電子工業股份有限公司						TITLE	SERIES
设计	签名	年月日	标准化	签名	年月日	PUSH SWITCH	RL5-6
绘图	符辉	21.10.20					FUNCTION
审核	张雪飞						ON-OFF
工艺			批准			VIEWS TYPE	DRAWING NUMBER